


# Herbert HFS

1.7, 2.3, 3.0 mm



## CANNULATED COMPRESSION SCREWS

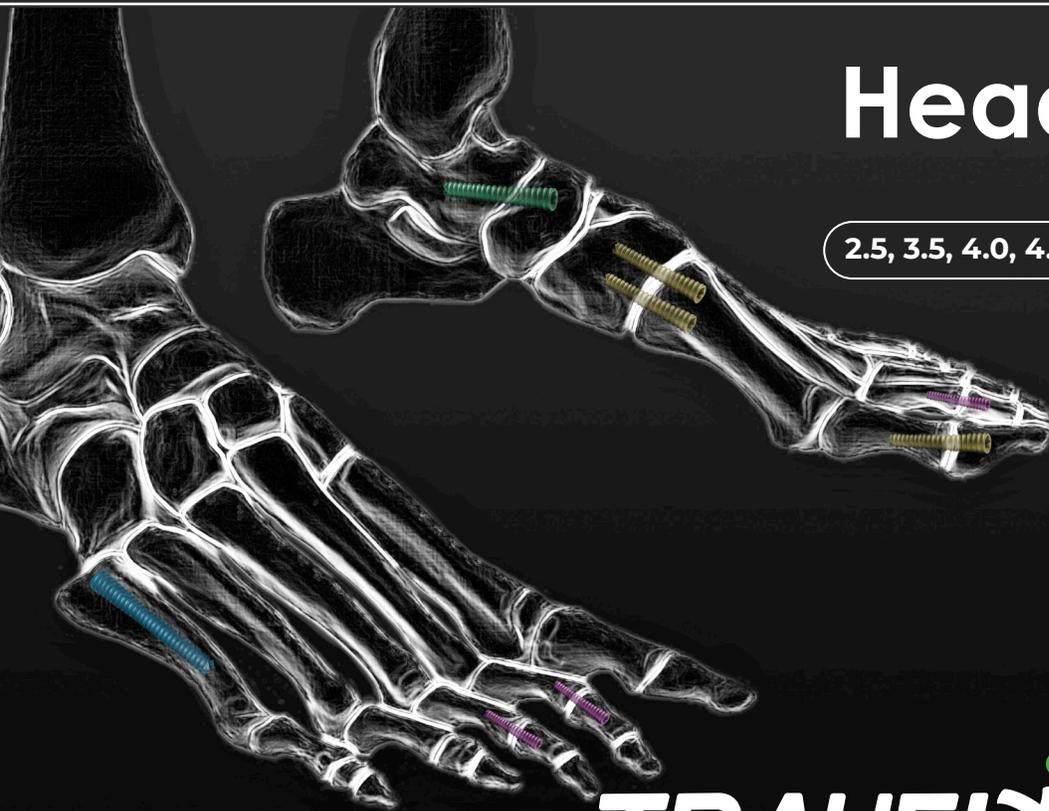

# Headless THS

2.5, 3.5, 4.0, 4.5, 5.0, 7.0 mm



**TRAUFIX**  
READY TO RUN

# CANNULATED COMPRESSION HERBERT SCREWS (HFS)

Head with notches for easy extraction.




Tip with self-drilling and self-tapping edges for facilitate implantation.



Thread pitch in head and stem, for closure and controlled compression of diastasis in the fracture line.

Measurement Table

Total Screw Length mm (Lt)	Thread Length mm L (Stem)	Ø Thread	
		2.3 mm	3.0 mm
10	5	x	x
12	5	x	x
14	5	x	x
16	5	x	x
18	5	x	x
20	5	x	x
22	5	x	x
24	6	x	x
26	6	x	x
28	6	x	x
30	6	x	x
32	6		x
34	7		x
36	7		x
38	8		x
40	8		x

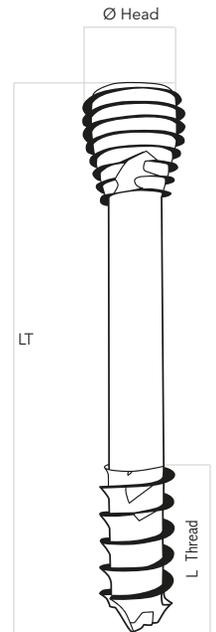

Two different types of synchronized steps to get a maximum reduction

# CANNULATED COMPRESSION HEADLESS SCREWS (THS)



THS is the next generation of screws headless fully threaded.

Tip with self-drilling and self-tapping edges to facilitate the implantation.



CONICAL DESIGN FOR HIGHER COMPRESSION

## MEASURES

### Cannulated compression Herbert Screws (HFS)

1.7mm / Code 259

2.3mm / Code 238

3.0mm / Code 239

Lenght

6mm  
7mm  
8mm  
9mm  
10mm  
11mm  
12mm  
13mm  
14mm  
15mm  
16mm  
18mm  
20mm

Lenght

10mm  
12mm  
14mm  
16mm  
18mm  
20mm  
22mm  
24mm  
26mm  
28mm  
30mm

Lenght


10mm 26mm  
12mm 28mm  
14mm 30mm  
16mm 32mm  
18mm 34mm  
20mm 36mm  
22mm 38mm  
24mm 40mm

COLOR RANGE

1.7

2.3

3.0



STAR DRIVE Torx type coupling for maximize contact surface (Herbert & Headless)

## MEASURES

### Cannulated compression Headless Screws (THS)

2.5mm / Code 244

3.5mm / Code 240

4.0mm / Code 241

Lenght

8mm  
10mm  
12mm  
14mm  
16mm  
18mm  
20mm  
22mm  
24mm  
26mm  
28mm  
30mm

Lenght

10mm  
12mm  
14mm  
16mm  
18mm  
20mm  
22mm  
24mm  
26mm  
28mm  
30mm

Lenght

16mm  
18mm  
20mm  
22mm  
24mm  
26mm  
28mm  
30mm  
32mm  
34mm

4.5mm / Code 242

5.0mm / Code 243

7.0mm / Code 261

Lenght

20mm  
22mm  
24mm  
26mm  
28mm  
30mm  
35mm  
40mm  
45mm  
50mm

Lenght

25mm  
30mm  
35mm  
40mm  
45mm  
50mm  
55mm  
60mm

Lenght

40mm 80mm  
45mm 85mm  
50mm 90mm  
55mm 95mm  
60mm 100mm  
65mm 105mm  
70mm 110mm  
75mm 120mm

COLOR RANGE

2.5

3.5

4.0

4.5

5.0

7.0



Titanium Alloy 6Al4V ELI ASTM F136

Special for surgical implants

Design by **TRAUFIX**  
READY TO RUN



MADE IN MEXICO

ISO 9001 ISO 13485

# HFS & THS SET

ALL-IN-ONE


**QTY. EQUIPMENT**

- 1 Kirchner 0.8mm x 120mm
- 1 Cannulated Drill with Stop
- 1 2.3 Solid Screwdriver
- 1 2.3 Cannulated Screwdriver
- 1 3.2 Solid Screwdriver
- 1 3.2 Cannulated Screwdriver
- 1 Tapered drill:
  - 3.5 for screw 2.5-3.5
  - 4.0 for screw 4.0
  - 4.5 for screw 4.5
  - 5.0 for screw 5.0
- 1 Kirchner Drill Guide Set, Drill Bit, Screwdriver
- 1 Measurer
- 1 Hook tip wire
- 1 Forceps with tips and adjustable guide (Guides for 1.8, 2.0 and 2.5)
- 1 Straight handle AO
- 1 Allen wrench



Our containers for implants and screws are manufactured with **TECAPRO MT** (Heat Stabilized Polypropylene) PP Medical Grade

Ideal material for sterilization containers

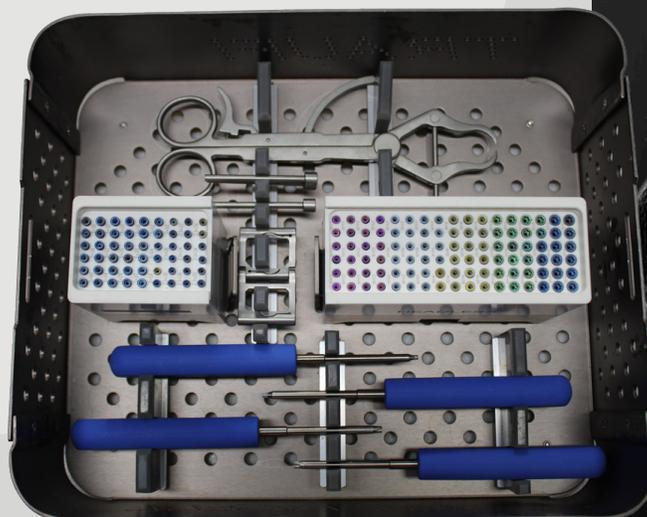

**TRAUFIX**

internationalsales@fixier.com.mx  
(+52) 55 8106 3240

[www.traufix.com](http://www.traufix.com)

**DIPROMEDIC MEXICO**

customerservice@dipromedic.com  
(55) 9000 4888/ 89/ 90/ 91

**DIPROMEDIC PERU**

gustavo.dominguez@dipromedic.com  
ventas.interdipro.peru@dipromedic.com  
(+51) 947 732 069

 traufix.mx

 traufix