



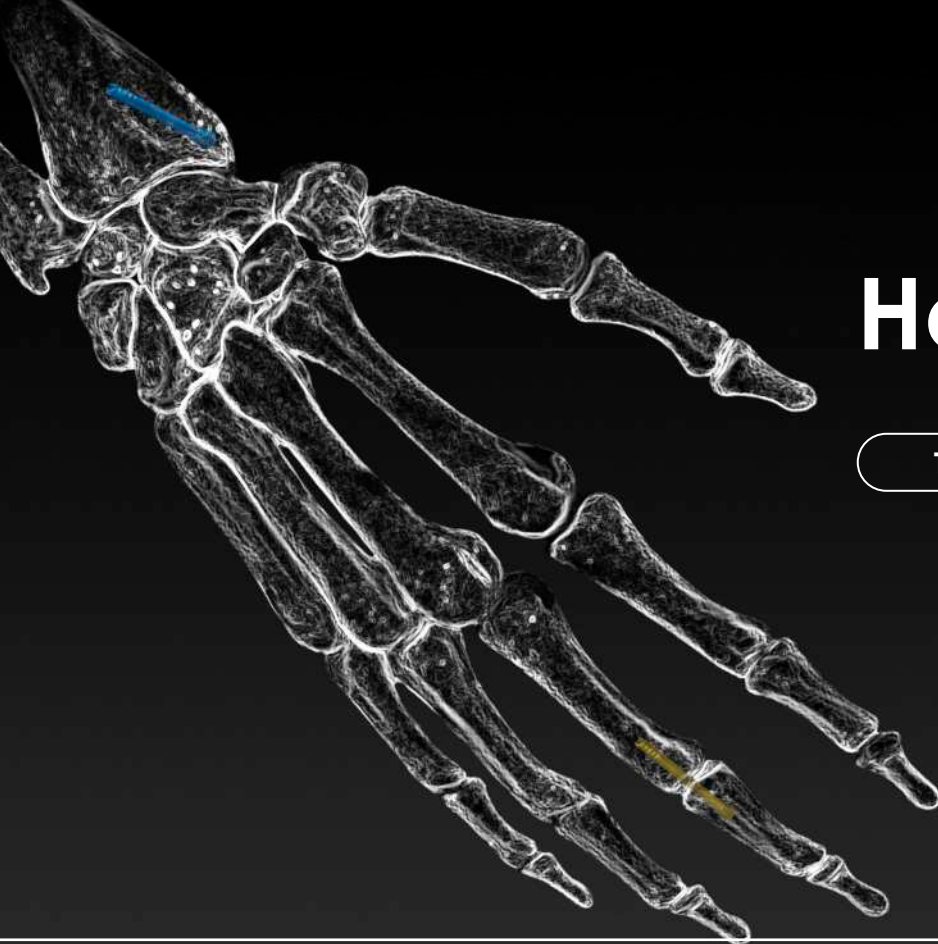


Herbert

HFS

1.7, 2.3, 3.0 mm

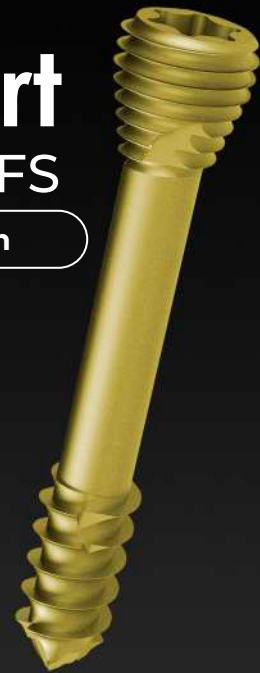

CANNULATED COMPRESSION SCREWS

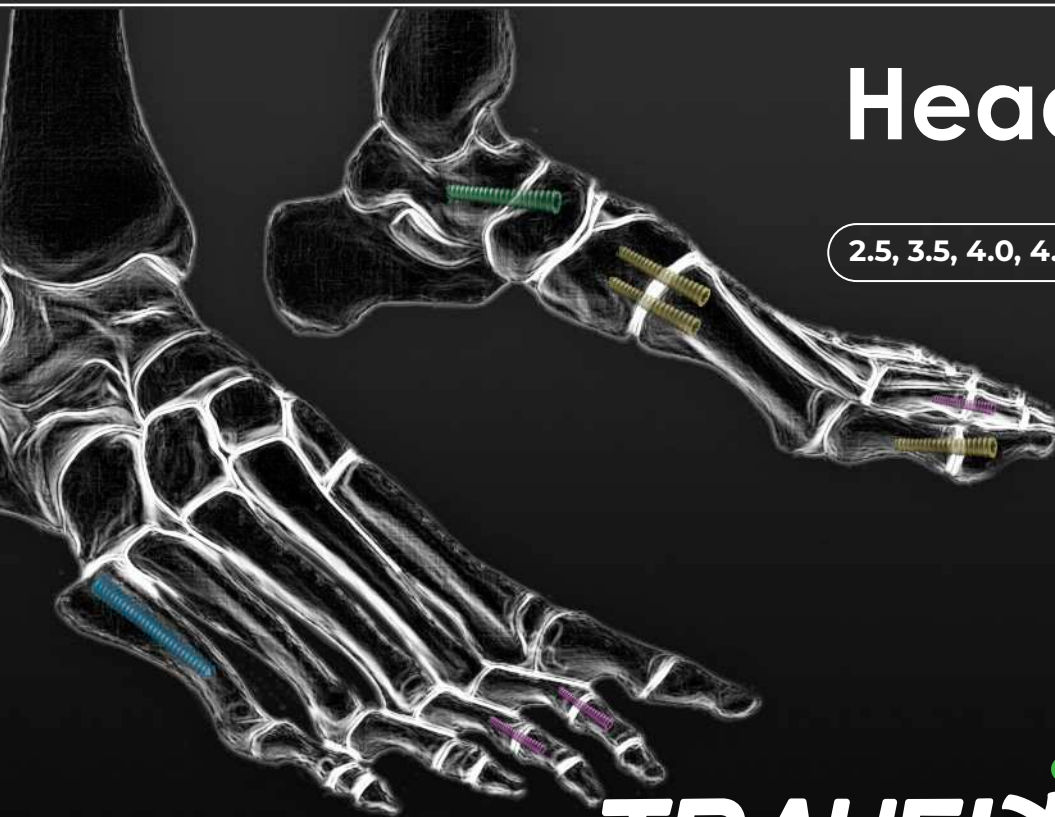

Headless

THS

2.5, 3.5, 4.0, 4.5, 5.0, 7.0 mm



TRAUFIX
READY TO RUN

CANNULATED COMPRESSION HERBERT SCREWS (HFS)

Head with notches for easy extraction.




Tip with self-drilling and self-tapping edges for facilitate implantation.



Thread pitch in head and stem, for closure and controlled compression of diastasis in the fracture line.

Measurement Table

Total Screw lenght mm (Lt)	Thread Length mm L (Stem)	Ø Thread	
		2.3 mm	3.0 mm
10	5	x	x
12	5	x	x
14	5	x	x
16	5	x	x
18	5	x	x
20	5	x	x
22	5	x	x
24	6	x	x
26	6	x	x
28	6	x	x
30	6	x	x
32	6		x
34	7		x
36	7		x
38	8		x
40	8		x

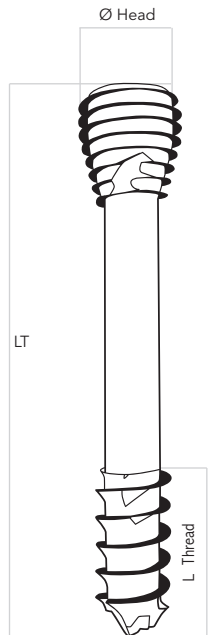

Two different types of synchronized steps to get a maximum reduction

CANNULATED COMPRESSION HEADLESS SCREWS (THS)



THS is the next generation of screws headless fully threaded.

Tip with self-drilling and self-tapping edges to facilitate the implantation.



CONICAL DESIGN FOR HIGHER COMPRESSION



MEASURES

Cannulated compression Herbert Screws (HFS)

1.7mm / Code 259

Lenght

8mm
9mm
10mm
11mm
12mm
13mm
14mm
15mm
16mm
18mm
20mm

2.3mm / Code 238

Lenght

10mm
12mm
14mm
16mm
18mm
20mm
22mm
24mm
26mm
28mm
30mm

3.0mm / Code 239

Lenght


10mm 26mm
12mm 28mm
14mm 30mm
16mm 32mm
18mm 34mm
20mm 36mm
22mm 38mm
24mm 40mm

COLOR RANGE

1.7

2.3

3.0



STAR DRIVE Torx type coupling for
maximize contact surface
(Herbert & Headless)

MEASURES

Cannulated compression Headless Screws (THS)

2.5mm / Code 244

Lenght

8mm
10mm
12mm
14mm
16mm
18mm
20mm
22mm
24mm
26mm
28mm
30mm

3.5mm / Code 240

Lenght

10mm
12mm
14mm
16mm
18mm
20mm
22mm
24mm
26mm
28mm
30mm

4.0mm / Code 241

Lenght

16mm
18mm
20mm
22mm
24mm
26mm
28mm
30mm
32mm
34mm

4.5mm / Code 242

Lenght

20mm
22mm
24mm
26mm
28mm
30mm
35mm
40mm
45mm
50mm

5.0mm / Code 243

Lenght

25mm
30mm
35mm
40mm
45mm
50mm
55mm
60mm

7.0mm / Code 261

Lenght

40mm 80mm
45mm 85mm
50mm 90mm
55mm 95mm
60mm 100mm
65mm 105mm
70mm 110mm
75mm 120mm

COLOR RANGE

2.5

3.5

4.0

4.5

5.0

7.0



Titanium Alloy 6Al4V ELI ASTM F136

Special for surgical implants

Design by **TRAUFIX**
READY TO RUN




MADE IN MEXICO

ISO 9001 **ISO 13485**


QTY. EQUIPMENT

- 4 K-Wire, non-threaded with trocar tip, Ø0.6 mm x 80 mm (Code 003.0680)
- 1 Handle with quick-release coupling (Code B330.2505105)
- 1 Countersink with quick-release coupling (Code B330.2505102)
- 1 Depth gauge 0.6 mm (Code B330.2025103)
- 1 Double guide 0.6/1.3 mm (Code B330.2505104)
- 1 1.3 mm drill bit with quick-release chuck (Code B330.2025105)
- 1 Torx 6 screwdriver (Code 378.06S)
- 1 Torx 6 screwdriver with 0.7 mm cannula (Code 378.06C)

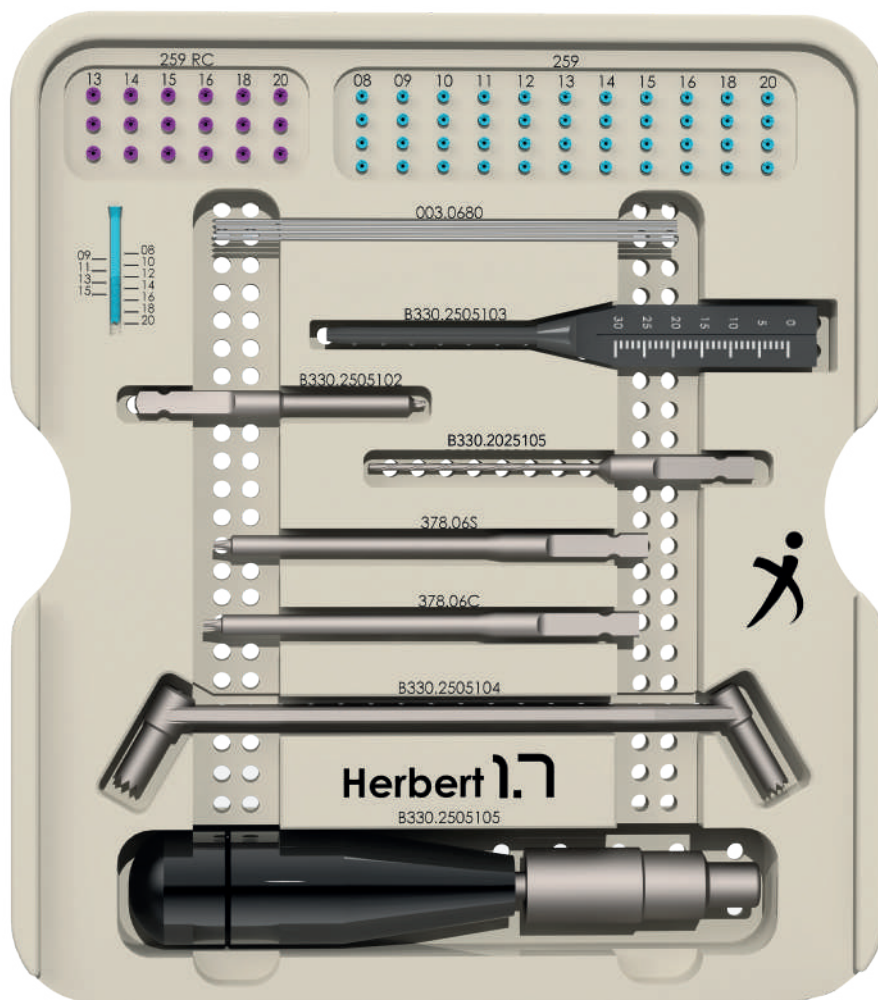

QTY. EQUIPMENT

- 1 Guide Wire Gauge ([Code MP20120](#))
- 1 Torx 20 screwdriver ([Code 378.20S](#))
- 1 Torx 20 screwdriver with 2.3 mm cannula ([Code 378.20C](#))
- 1 250 mm Torx 20 screwdriver. ([Code 378.20LS](#))
- 1 250 mm Torx 20 screwdriver with 2.3 mm cannula ([Code 378.20LC](#))
- 2 K-Wire, 2.0 mm diameter, 300 mm length, 20 mm thread ([Code 005.2030](#))
- 2 K-Wire, diameter 2.0 mm, length 250 mm, 20 mm thread ([Code 005.2025](#))
- 1 Tapered drill bit, diameter 5.0 mm ([Code 41.50](#))

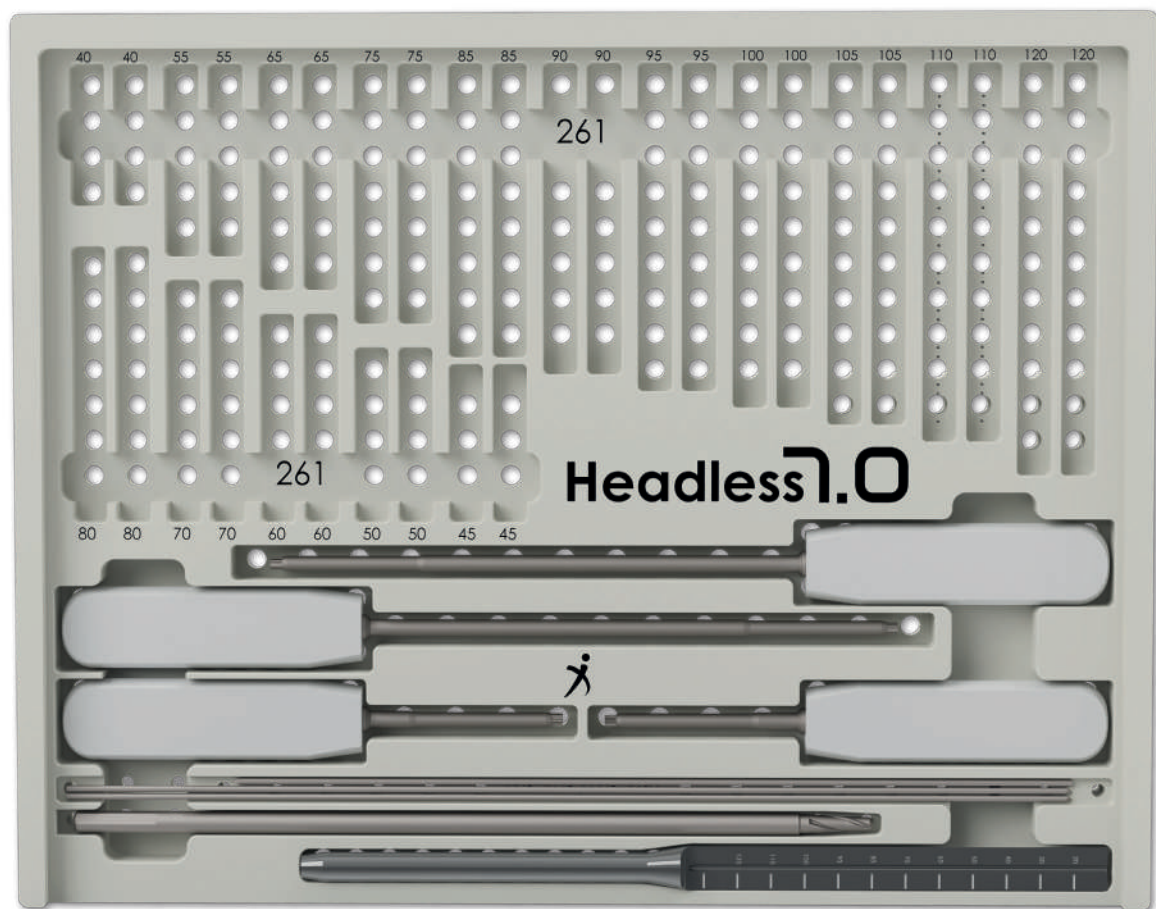


HFS & THS SET

ALL-IN-ONE


QTY. EQUIPMENT

- 1 Kirchner 0.8mm x 120mm
- 1 Cannulated Drill with Stop
- 1 2.3 Solid Screwdriver
- 1 2.3 Cannulated Screwdriver
- 1 3.2 Solid Screwdriver
- 1 3.2 Cannulated Screwdriver
- 1 Tapered drill:
 - 3.5 for screw 2.5-3.5
 - 4.0 for screw 4.0
 - 4.5 for screw 4.5
 - 5.0 for screw 5.0
- 1 Kirchner Drill Guide Set, Drill Bit, Screwdriver
- 1 Measurer
- 1 Hook tip wire
- 1 Forceps with tips and adjustable guide
(Guides for 1.8, 2.0 and 2.5)
- 1 Straight handle AO
- 1 Allen wrench

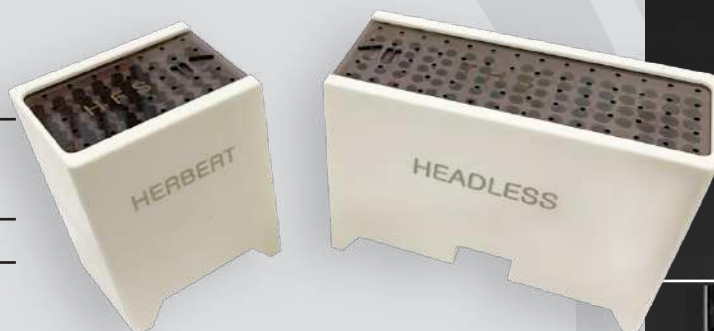

Our containers for implants and screws are manufactured with **TECAPRO MT** (Heat Stabilized Polypropylene) PP Medical Grade

Ideal material for sterilization containers

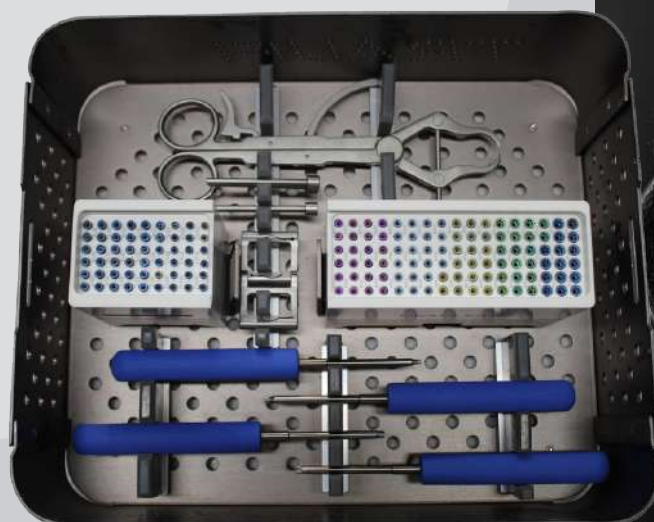

TRAUFIX

internationalsales@fixier.com.mx
(+52) 55 8106 3240

www.traufix.com

DIPROMEDIC MEXICO

customerservice@dipromedic.com
(55) 9000 4888/ 89/ 90/ 91

DIPROMEDIC PERU

gustavo.dominguez@dipromedic.com
ventas.interdipro.peru@dipromedic.com
(+51) 947 732 069

 traufix.mx

 traufix