



ELIX

ELIX PROXIMAL FEMORAL NAIL ANTIROTATION


TRAUFIX
READY TO RUN

ELIX PROXIMAL FEMORAL NAIL ANTIROTATION


Innovative locking system offering high rotational and angular stability

Closure Plug locks the sleeve to prevent subsequent slippage.

Ovoid hole prevents rotation

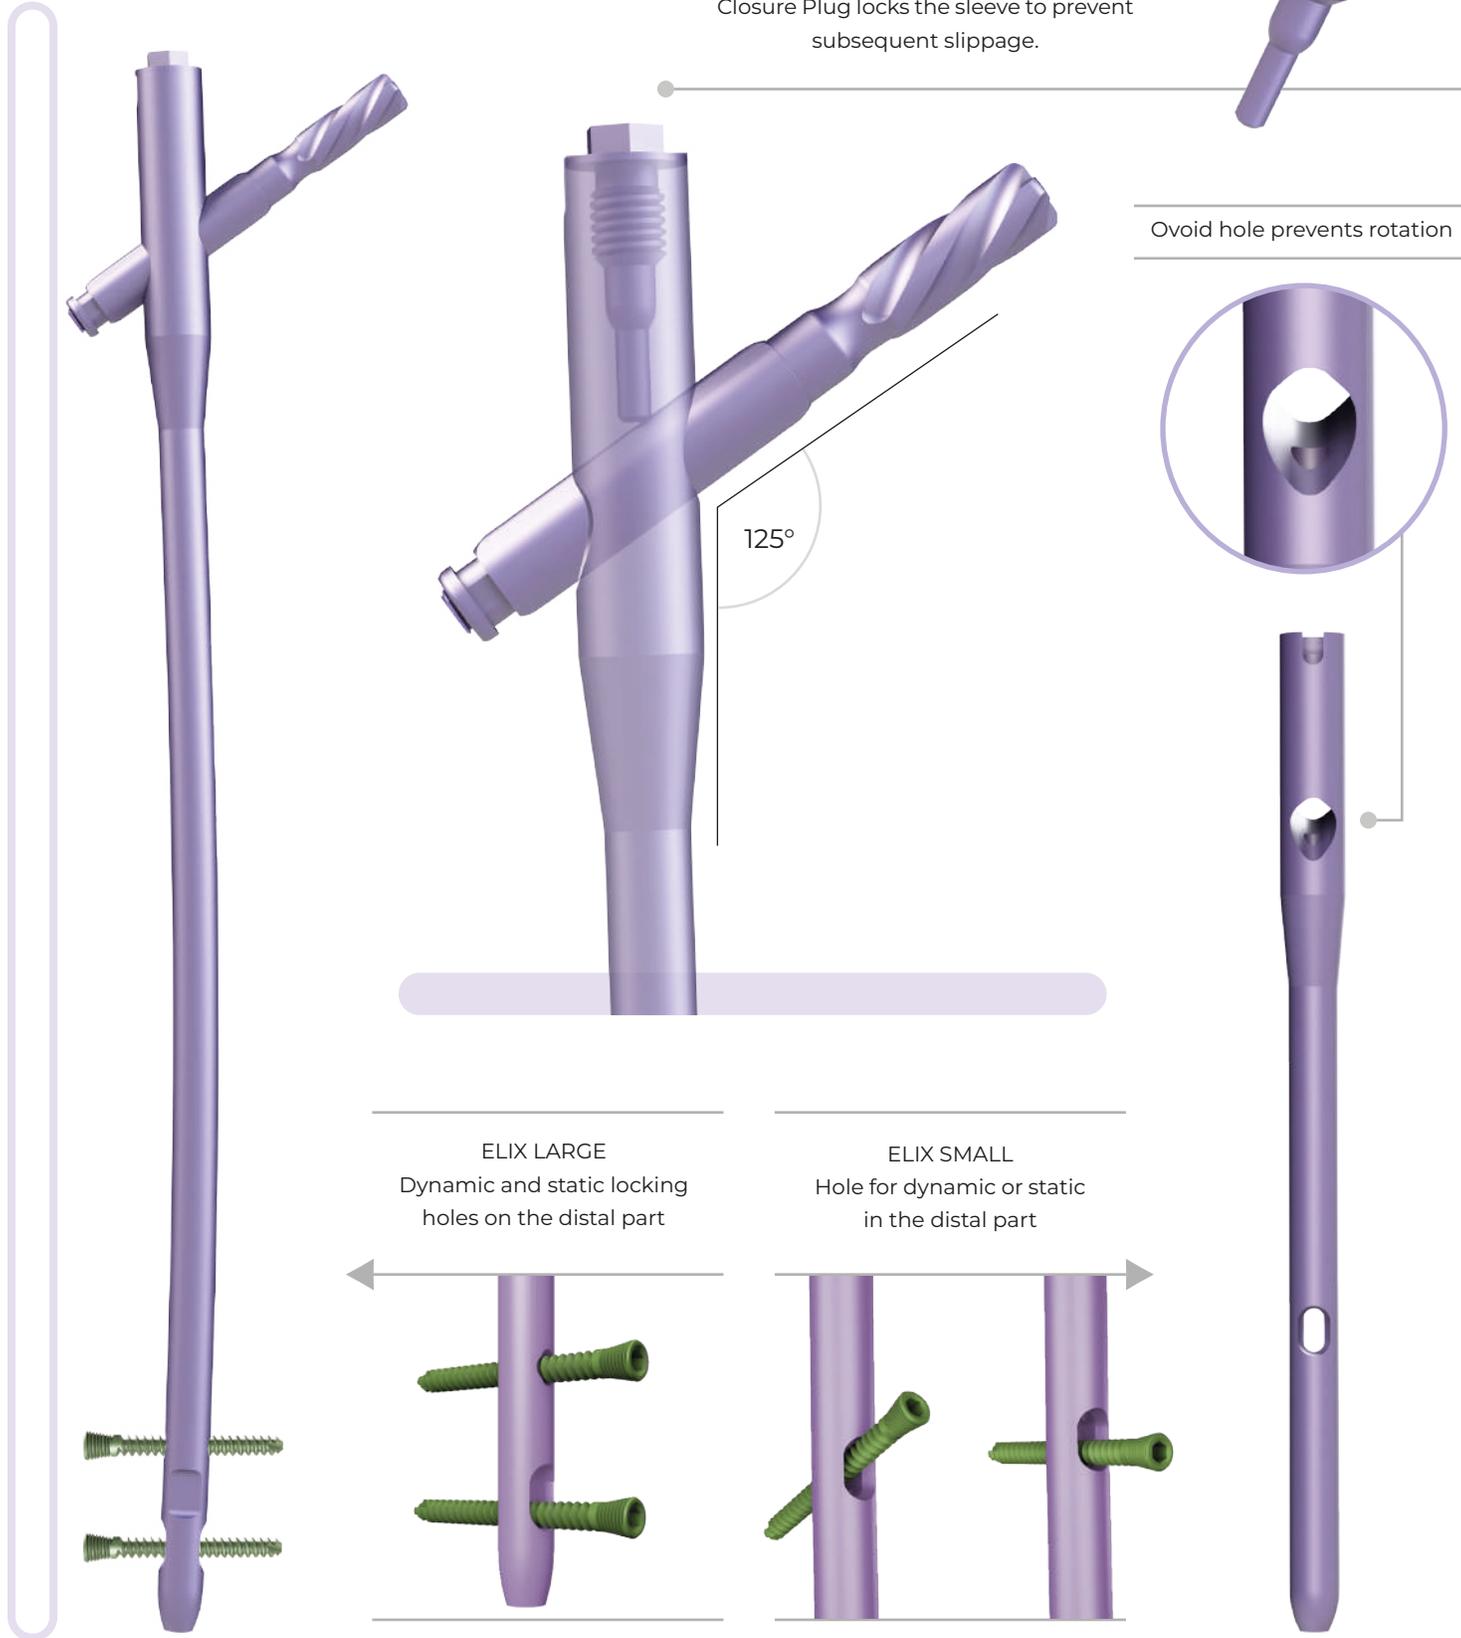

Screw with 5mm movement through the sleeve allows interfragmentary compression with a more dynamic locking when reducing the femur.

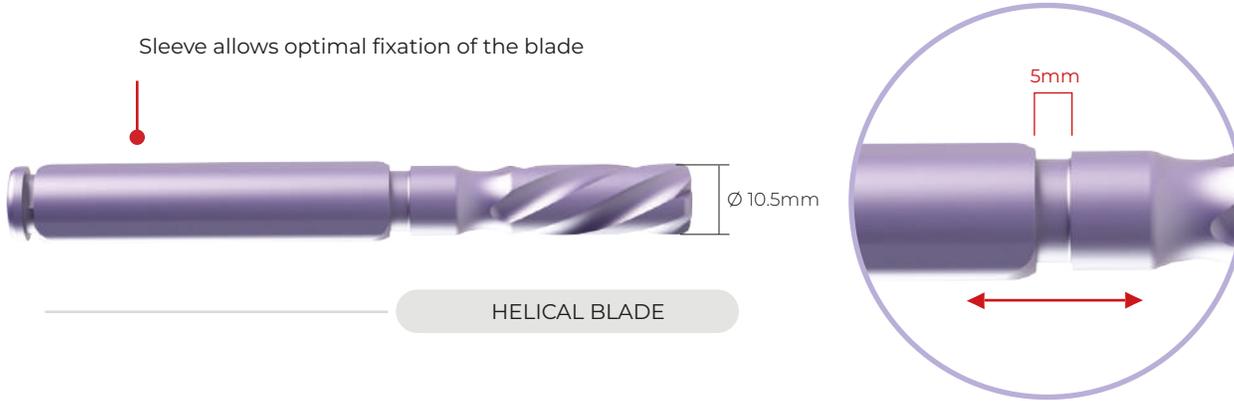

MEASURES

ELIX Proximal Femoral Nail Antirotation | Small

Length	Diameter 9mm	Diameter 10mm	Diameter 11mm	Diameter 12mm
170mm	Code 277.170	Code 278.170	Code 279.170	Code 280.170
200mm	Code 277.200	Code 278.200	Code 279.200	Code 280.200
240mm	Code 277.240	Code 278.240	Code 279.240	Code 280.240

ELIX Proximal Femoral Nail Antirotation | Large

Length	Diameter 9mm	Diameter 10mm	Diameter 11mm
320mm	Left Code 282.320 / Right Code 283.320	Left Code 284.320 / Right Code 285.320	Left Code 286.320 / Right Code 287.320
340mm	Left Code 282.340 / Right Code 283.340	Left Code 284.340 / Right Code 285.340	Left Code 286.340 / Right Code 287.340
360mm	Left Code 282.360 / Right Code 283.360	Left Code 284.360 / Right Code 285.360	Left Code 286.360 / Right Code 287.360
380mm	Left Code 282.380 / Right Code 283.380	Left Code 284.380 / Right Code 285.380	Left Code 286.380 / Right Code 287.380
400mm	Left Code 282.400 / Right Code 283.400	Left Code 284.400 / Right Code 285.400	Left Code 286.400 / Right Code 287.400

Helical Blade

Ø 10.5mm

75mm	Code 293.75
80mm	Code 293.80
85mm	Code 293.85
90mm	Code 293.90
95mm	Code 293.95
100mm	Code 293.100
105mm	Code 293.105
110mm	Code 293.110
115mm	Code 293.115
120mm	Code 293.120

Locking Plug

0mm	Code 292.00
5mm	Code 292.05
10mm	Code 292.10

Note: Blade comes with sleeve, bolt and adjusting nut

4.5mm LOCKING SCREW FOR INTRAMEDULLARY NAIL (CODE 166, LENGTH 25mm-80mm)

Titanium Alloy 6Al4V ELI ASTM F136

Special for surgical implants

Design by **TRAUFIX**
READY TO RUN

MADE IN MEXICO







FEMORAL NAIL ANTIROTATION SET

INSTRUMENTATION AND IMPLANTS SET. ALL-IN-ONE

QTY. EQUIPMENT

- 1 Drill bit Ø 4.3 mm
- 1 Drill bit with stop Ø 4.3 mm
- 1 Reduction rod with cannulated T-handle
- 1 Key
- 1 Proximal cannulated reamer drill
- 1 Guide sleeve
- 1 Flat wrench SW11
- 1 Drill bit with T-handle Ø 5.2 mm
- 1 T-handle Position Rod
- 1 Depth gauge 70-120 mm
- 1 Quick coupling T-handle
- 1 Inner sleeve for drill bit Ø 5.2 mm
- 1 Inner sleeve with punch
- 1 Hexagonal screwdriver with T-handle Ø 8.0 mm
- 1 Proximal cannulated drill tip with stop 60-140 Ø11.2 mm
- 1 Nail extraction guide
- 1 Distal Position Lock
- 1 Hex Key Small SW 3.0
- 1 Hex Key Large SW 5.0
- 1 Blade screw device Ø4.5 mm
- 1 Nail holding bolt
- 1 Small bolt
- 1 Long bolt
- 1 Thick bolt
- 1 170-440 graduated ruler (Ø 9, Ø 10, Ø 11, Ø 12/130°).
- 4 Threaded tip guide wire
- 1 Reamer head base
- 1 Starter AWL
- 1 Cannulated screwdriver
- 1 Hexagonal screwdriver SW 3.5 mm
- 1 Sleeve guide
- 1 Saw Blade Screwdriver
- 1 Depth gauge 0-90 mm
- 1 Locking Plug guide
- 1 Flexible Reamer Bar Ø 8.0
- 1 Inner sleeve Ø 5.2 mm
- 1 Proximal Guider Device
- 1 Distal Guider device 240
- 1 Distal Guider device 90° 170/200
- 1 Distal Guider device 170
- 1 Main pin impactor
- 1 Tissue dilator
- 1 Connector
- 1 Cannulated screwdriver Ø 4.0 mm
- 1 U-shaped support for ruler
- 1 Sliding hammer
- 1 Solid hammer 500 grams
- 1 Distal locking ruler for long nails
- 1 Guider Wire Holder
- 1 Tissue Protection Plate
- 1 Distal ruler for long nail 320-440
- 1 Long Nail Distal Guider Bar
- 1 Olive Guide Wire
- 1 Cannulated reamer head
Ø 9.0mm, Ø 9.5mm, Ø 10.0mm,
Ø 10.5mm, Ø 11.0mm, Ø 11.5mm,
Ø 12.0mm, Ø 12.5mm, Ø 13.0mm,
Ø 13.5mm.

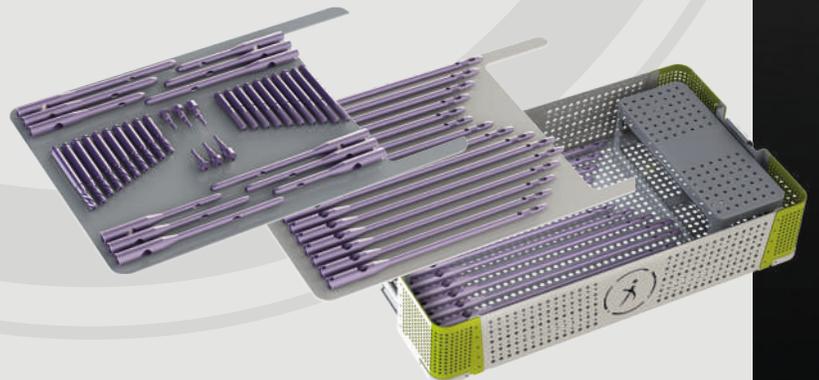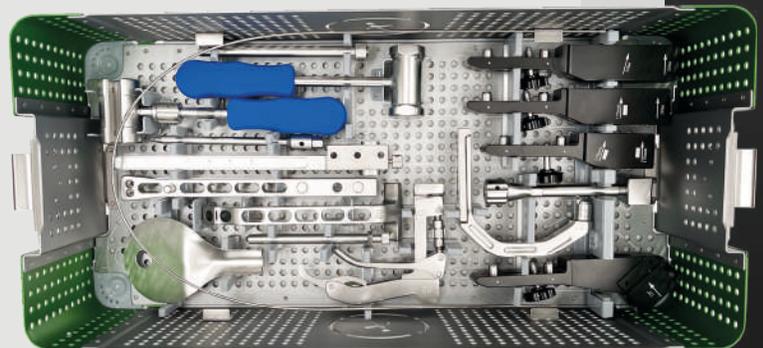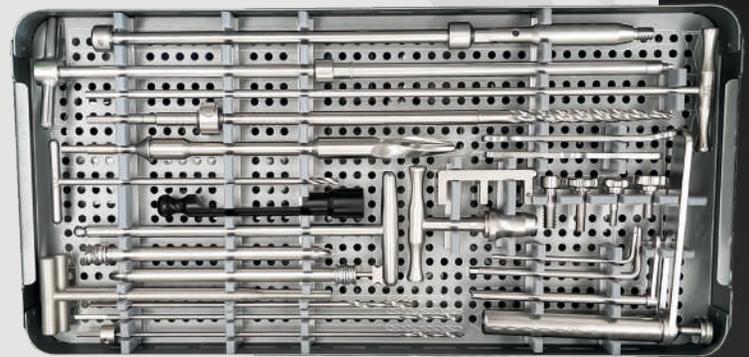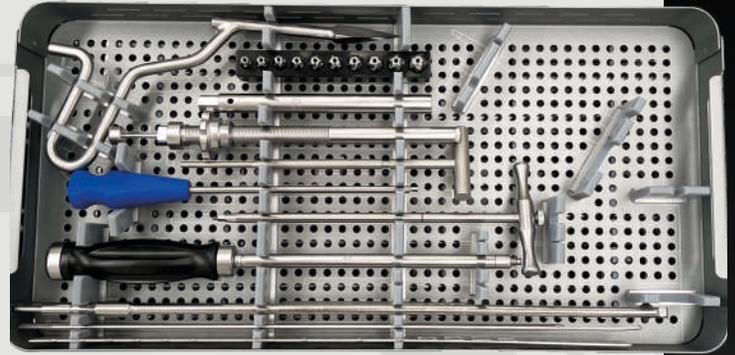

TRAUFIX

internationalsales@fixier.com.mx
(+52) 55 8106 3240

www.traufix.com

DIPROMEDIC MEXICO

customerservice@dipromedic.com
(55) 9000 4888/ 89/ 90/ 91

DIPROMEDIC PERU

gustavo.dominguez@dipromedic.com
ventas.interdipro.peru@dipromedic.com
(+51) 947 732 069

 traufix.mx

 traufix